

**GENERAL LIGHTING - LINEAR**

**C-GENERAL-LIN LP1-2**

(available only when ordered with a Cooledge Specialty Illumination Solution)



**APPLICATION**

- Recessed linear points (non-IC ceilings)
- 500mA (MF) or 1050mA (HF) DC LED remote power supply
- For indoor use only

**PHOTOMETRIC**

Light Source:

- MF = 2 x 1.4W = 2.8W (500mA)
- HF = 2x 3.1W = 6.2W (1050mA)
- CRI: >90

**MECHANICAL**

Dimensions:

- Length = 3-11/16" (94mm); Width = 2" (50mm); Height = 2-1/4" (58mm)
- IP Rating: IP20
- Weight: 0.4lbs (0.18kg)

**ELECTRICAL**

- Remote Power Supply: 500mA DC or 1050mA DC (contact Cooledge for ordering information)

**MOUNTING**


- Cut Out Size: 3"-5/16 x 1"-9/16 (84mm x 40mm)

**FINISH COLOR**


Add your selection using the following codes:

- B-B – Black + Black
- B-W – Black + White
- B-C – Black + Chrome
- B-MMAT – Black + Gold Matte
- W-B – White + Black
- W-W – White + White
- W-C – White + Chrome
- W-MMAT – White + Gold Matte

**ACCESSORIES**

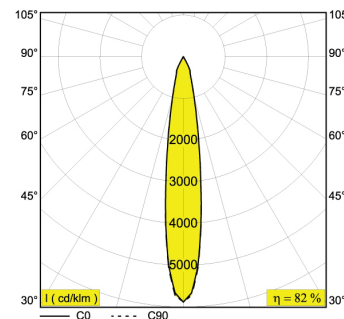

Beam angles available: 16° (SP) shown, 32° (FL) shown, 46° (FL)

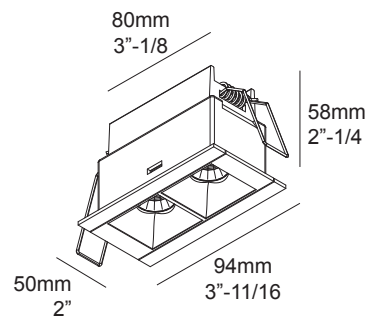

Beam Angle 931	3000K				3500K			
	Source Lumens	Delivered Lumens (MF)	Delivered Lumens (HF)	Order Code	Source Lumens	Delivered Lumens (MF)	Delivered Lumens (HF)	Order Code
16° (SP)	314/592	258	487	C-6 424 213 02 931	326/616	267	507	C-6 424 213 02 951
32° (FL)	314/592	232	439	C-6 424 213 02 932	326/616	241	457	C-6 424 213 02 952
46° (FL)	314/592	185	348	C-6 424 213 02 933	326/616	192	362	C-6 424 213 02 953

**GENERAL LIGHTING - LINEAR**

**C-GENERAL-LIN LP1-4**

(available only when ordered with a Cooledge Specialty Illumination Solution)

**APPLICATION**

- Recessed linear points (non-IC ceilings)
- 500mA DC LED remote power supply
- For indoor use only

**PHOTOMETRIC**

- Light Source: 4 x 1.4W = 5.6W (500mA)
- CRI: >90

**MECHANICAL**

Dimensions:

- Length = 6-1/16" (154mm); Width = 2" (50mm); Height = 2-1/4" (58mm)
- IP Rating: IP20
- Weight: 0.9lbs (0.41kg)

**ELECTRICAL**

- Remote Power Supply: 500mA DC (contact Cooledge for ordering information)

**MOUNTING**


- Cut Out Size: 12"-1/4" x 1"-9/16 (311mm x 40mm)

**FINISH COLOR**


Add your selection using the following codes:

- B-B –Black + Black
- B-W –Black + White
- B-C –Black + Chrome
- B-MMAT –Black + Gold Matte
- W-B –White + Black
- W-W –White + White
- W-C –White + Chrome
- W-MMAT – White + Gold Matte

**ACCESSORIES**

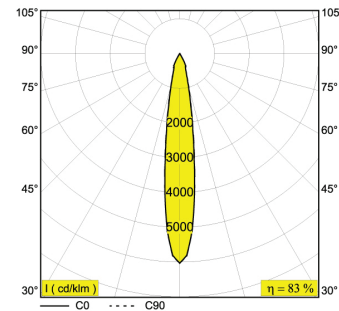

Beam angles available: 14° (SP) shown, 32° (FL) shown, 49° (FL)

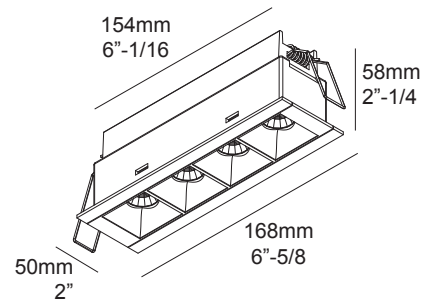

Beam Angle 931	3000K			3500K		
	Source Lumens	Delivered Lumens (HF)	Order Code	Source Lumens	Delivered Lumens (HF)	Order Code
14° (SP)	628	459	C-6 424 213 04 931	652	476	C-6 424 213 04 951
32° (FL)	628	460	C-6 424 213 04 932	652	477	C-6 424 213 04 952
49° (FL)	628	352	C-6 424 213 04 933	652	469	C-6 424 213 04 953