

COOLEEDGE™

COOLEEDGE LUMINOUS CEILINGS FABRILUM RECTANGLES - CE COMPLIANT (EMEA): SPECIFICATIONS

PROJECT		REFERENCE TYPE	
SPECIFIED BY		QUANTITY	
DATE		NOTE	Luminous Ceilings

DESCRIPTION

FABRILum luminaires deliver best-in-class immersive illumination at a scale that brings the feeling of the outdoors to interior spaces. More than that, FABRILum goes **beyond lighting** to deliver so much more; unparalleled acoustic performance and new architectural forms.

Perfect for almost any design including:

- Lobbies, atriums, and indoor plazas
- Open plan offices and co-working spaces
- Shop-in-shop retail
- Showrooms



SIZES

Nominal Size (W x L)	Suspended	Surface Mount	Recessed	Grid (T-Bar)
RS (4' x 4' / 1200mm x 1200mm)	✓	✓	✓	✓
RM (4' x 6' / 1200mm x 1800mm)	✓	✓	✓	
RL (4' x 8' / 1200mm x 2400mm)	✓	✓		
RXL (6' x 6' / 1800mm x 1800mm)	✓	✓		
RXXL (6' x 8' / 1800 x 2400mm)	✓	✓		

GENERAL

Location	Indoor, dry location only
Operating Temperature	0 – 40°C (32 – 104°F)
Storage Temperature	-40 – +85°C (-40 – +185°F)
Relative Humidity	90% max (non-condensing)
Input Voltage	120-277 VAC
Diffuser Material	Translucent Polyvinyl Chloride*
Frame Material	Aluminum
Fire Rating	EN:3501-1 Class B



Cooledge Lighting Inc.
110-13551 Commerce Parkway
Richmond, BC V6V 2L1 Canada

O +1 604 273 2665
F +1 604 273 2660
T +1 844 455 4448
W cooledgelighting.com

Cooledge Lighting reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

COOLEEDGE LUMINOUS CEILING
FABRILUM RECTANGLES - CE COMPLIANT (EMEA): SPECIFICATIONS

PHOTOMETRICS

Size	CCT	Flux (lm)	
		High (HF)	Standard (SF)
RS	3000K	9,700	5,000
	3500K	10,000	5,000
	4000K	10,300	5,000
	TNW	8,950	5,000
RM	3000K	14,600	7,500
	3500K	15,050	7,500
	4000K	15,500	7,500
	TNW	13,450	7,500
RL	3000K	19,400	10,000
	3500K	20,000	10,000
	4000K	20,600	10,000
	TNW	17,900	10,000
RXL	3000K	21,850	11,000
	3500K	22,500	11,000
	4000K	23,200	11,000
	TNW	20,150	11,000
RXXL	3000K	28,700	14,500
	3500K	29,600	14,500
	4000K	30,500	14,500
	TNW	26,500	14,500

CRI (Ra)	>90
Color Uniformity (Typical)	2 SDCM
Lumen Maintenance (L80)	75,000 hr

TM-30-15 DATA

Index	TNW*	3000K	3500K	4000K
Rf	90	90	89	90
Rg	102	98	99	100

*TNW = Tunable White 2700K-5700K (both channels @50%)

For more details about **FABRILum** color rendering properties, please see "Light Quality Metrics" at www.cooledgelighting.com

ACOUSTIC PERFORMANCE

Mounting Type	Noise Reduction Coefficient	Sound Absorption Average	Weighted Sound Absorption Coefficient (ISO EN11654)
	NRC	SAA	α_w
Suspended	0.90	0.91	0.90
Surface Mount	0.60	0.62	0.45 (M)
Recessed (Grid)	0.65	0.66	0.40 (LM)

A full acoustic report is available at <https://www.cooledgelighting.com/acoustic-lighting#testreports>

COOLEdge LUMINOUS CEILINGs
FABRILUM RECTANGLES - CE COMPLIANT (EMEA): SPECIFICATIONS

INPUT POWER


Nominal Size	CCT	High Flux (HF)	Standard Flux (SF)
		Power (W)	Power (W)
RS 4' x 4' 1200mm x 1200mm	3000K	131	69
	3500K	131	68
	4000K	131	66
	TNW	131	72
RM 4' x 6' 1200mm x 1800mm	3000K	196	103
	3500K	196	101
	4000K	196	99
	TNW	197	108
RL 4' x 8' 1200mm x 2400mm	3000K	261	137
	3500K	261	135
	4000K	261	132
	TNW	262	143
RXL 6' x 6' 1800mm x 1800mm	3000K	294	154
	3500K	294	151
	4000K	294	148
	TNW	295	161
RXXL 6' x 8' 1800mm x 2400mm	3000K	392	205
	3500K	392	201
	4000K	392	197
	TNW	392	216

COOLEEDGE LUMINOUS CEILINGS FABRILUM RECTANGLES - CE COMPLIANT (EMEA): SPECIFICATIONS


DIMENSIONS

Size	External Dimensions mm (in)		Weight	# Mounting Points
	W	L	kg (lbs)	
RS	1193 (47.0)	1193 (47.0)	14 (31)	4
RM	1193 (47.0)	1768 (69.6)	25.8 (57)	4
RL	1193 (47.0)	2343 (92.2)	32.0 (71)	4
RXL	1768 (69.6)	1768 (69.6)	32.0 (71)	4
RXXL	1768 (69.6)	2343 (92.2)	41 (90)	4

- Profile Height = 100mm (3.9")
- Overall Height (including Mounting Rails) = 133mm (5.2")
- Surface Mount will have an opening of 33mm (1.3") between the frame and the ceiling



MOUNTING DETAILS

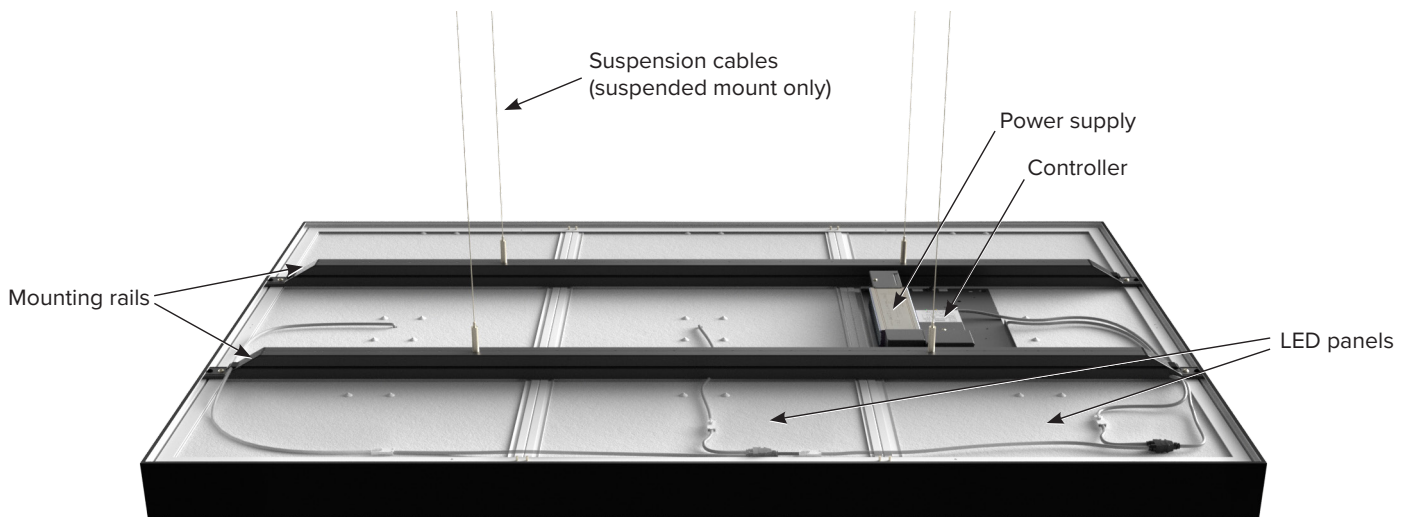

Mounting Type	Mounting Kit Required	Notes
Surface Mount	No mounting kit necessary	Mounts directly to the ceiling material through the mounting rails
Suspended	Mounting Kit included	Hardware for cable attachment to luminaire
Recessed	Mounting Kit included	Provides a trim for mounting within drywall or plaster ceiling (RS, RM sizes only)
Grid (T-Bar) - Metric	No mounting kit necessary	Lay-in for use with 24mm T-Bar (RS size only) Specify Surface Mount luminaire

COOLEdge LUMINOUS CEILING FABRILUM RECTANGLES - CE COMPLIANT (EMEA): SPECIFICATIONS

POWER AND CONTROL



Power Supply with CooleEdge Control Module

Actual power & control configuration is determined by the luminaire model.

Power & Control Mounting Plate

Mounting Plate Dimensions:

RS, RM, RL, RXL, RXXL = 400mm x 190mm (15.75" x 7.5")

FABRILum offers two choices for locating the power and control components:

- **Integrated (Suspended & Recessed):** the mounting plate containing the power supply and control module may be secured to the top of the luminaire. AC electrical connections are made directly to the power supplies at the luminaire
- **Remote Mounted (All):** the mounting plate can be located remotely in a location that may be more suitable for AC electrical connection or for maintenance access (see www.cooledgelighting.com or contact CooleEdge for remote distance wiring requirements)

Power Supply Performance

Input Voltage	120-277 VAC
Input Frequency	Nom. 50-60 Hz
Start-up Time	1.5 sec
Max. Inrush Current	60 A
Rated Lifetime	200,000 hr

Control Module Performance

Minimum Dim Level	0.1% (Deep Dimming)
Operating Frequency	3000Hz (compliant with IEEE 1789-2015 for flicker free)
Control Protocols	Wireless (Casambi), DALI

HOW TO ORDER

FBx - Rx - 3 - 4 - 5 - 6 - CE

1 2 3 4 5 6 7

RS/RM/RL/RXL/RXXL

1 PRODUCT

FBS = FABRILum – Suspended
 FBM = FABRILum – Surface Mount
 FBR = FABRILum – Recessed¹

2 NOM. SIZE

RS
 RM
 RL
 RXL
 RXXL

3 FLUX

HF = High Flux
 SF = Std Flux

4 CCT

30 = 3000K
 35 = 3500K
 40 = 4000K
 TNW = Tunable White

5 FINISH

WH = White
 BL = Black

6 DIMMING

DAL = DALI²
 CAS = Casambi

7 CERTIFICATION

CE = CE Compliant

1: White finish only, RM, RS, sizes only
 2: DALI only in CE certification

CooleEdge offers the option of adding a faux perforated metal finish to our FABRILum products. Please contact us for details and ordering process.

WELL STANDARD (V2)

Cooledge FABRILum luminaires enhance the user experience of spaces by delivering immersive illumination that impacts not only the visual, but also the emotional and physiological, response of people. New standards that define requirements for promoting design that enhances well-being are emerging. One of those standards, WELL v2, includes 9 “features” for lighting design that define requirements for the quality and composition.

The following data is provided to assist designers in determining compliance with the WELL v2 standard when incorporating Cooledge FABRILum luminaires in their design.

Feature L03: Circadian Lighting Design

This feature requires a calculation of Equivalent Melanopic Lux (EML):

$$EML = \text{Photopic Lux} \times \text{Melanopic Ratio}$$

Melanopic Ratio for FABRILum

	TNW*	3000K	3500K	4000K
Melanopic Ratio**	0.704	0.517	0.620	0.779

*Tunable White: 2700K @ 50% + 5700K @ 50%

**Calculated using the IWBI Melanopic Ratio calculator

Feature L04: Glare Control

This feature requires maximum values for different types of glare measurements.

Compliance requirement (d): Luminance < 6000 cd/m² between 45°-90° from nadir

Maximum Luminance for FABRILum

	Standard Flux (SF)	High Flux (HF)
Maximum Luminance* (cd/m ²)	1580	2375

*Maximum occurs at 45°

Feature L07: Electric Light Quality – Part 1 Ensure Color Rendering Quality


This feature requires minimum values for color rendering.

Compliance requirement (a): CRI > 90

CRI (Ra) for FABRILum

	TNW*	3000K	3500K	4000K
CRI (Ra)	96	94	94	94

Feature L07: Electric Light Quality – Part 2 Manage Flicker

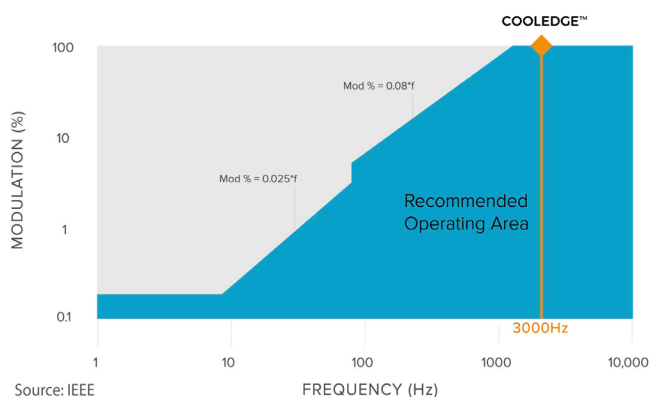

For LED-based luminaires, this feature requires specific values for the combination of frequency and modulation.

Compliance requirement: Meet IEEE 1789-2015 Standard Practice Recommendation