

COOLEEDGE™

COOLEEDGE LIGHT QUALITY METRICS: TILE INTERIOR - 5700K

NOTES ABOUT LIGHT QUALITY METRICS DATA:

- Values shown are TYPICAL – actual performance of individual units may vary
- The data presented has been generated in accordance with LM-79-08
- A complete summary of LM-79-08 data is provided for 600 lm/sqft (6450 lm/m²) TILE models only; however, spectral and color rendering data is applicable to TILE models of the same CCT at lower lumen output levels (150/1600 & 300/3225), including:
 - Spectral Power Distribution (SPD)
 - Nominal CCT
 - Chromaticity
 - R_f and R_g (TM-30-15)
 - CRI (R_a) and R-values
 - D_{uv}

SELECTED DEFINITIONS

- **Candlepower:** As presented in this document it is the same as “candela” the SI unit of measurement for light intensity.
- **CRI (R_a):** The general Color Rendering Index based on 8 CIE reference pastel color samples.
- **D_{uv} :** The American National Standards Institute (ANSI) references D_{uv} , a metric based on the CIE 1976 color space that quantifies the distance between the chromaticity of a given light source and a blackbody radiator of equal CCT. A negative D_{uv} indicates that the source is “below” the Planckian locus (blackbody curve), potentially having a red/blue tint, whereas a positive D_{uv} indicates that the source is “above” the curve, potentially exhibiting a green tint.
- **Nominal CCT Quadrangles:** ANSI has defined acceptable chromaticity quadrangles for LED binning in relation to the blackbody curve within CIE color space. The data presented shows the typical chromaticity coordinate within the relevant quadrangle.
- **R-value (R_i):** The R-value is a mathematical calculation measuring how similar a light source renders a particular color compared to a reference blackbody source of the same CCT. R-values are not absolute and therefore cannot be used as a specific measurement of color rendering. For example, a 2700K source may have a lower R9 value than a 5700K source, however, in absolute terms the 2700K source will render saturated red much better than the 5700K source because of the relative abundance of red in the spectral power distribution (SPD) for the 2700K source in comparison.
- **R1-R15:** The data presented include the special CRI set of CIE 14 samples and the Japanese Industrial Standard (JIS) for R15.
- **R_f :** The IESNA TM-30-15 technical memorandum for measuring color rendering defines a “fidelity” index, R_f , that is similar to CRI and quantifies the average difference in appearance between the test source and a reference source based on 99 reference colors.
- **R_g :** The IESNA TM-30-15 technical memorandum for measuring color rendering defines a “gamut” index, R_g , that quantifies the average difference in color saturation between the test source and a reference source based on 99 reference colors.

COOLEGE LIGHT QUALITY METRICS: TILE INTERIOR - 5700K

LIGHTING PROPERTIES: TYPICAL PERFORMANCE


TEST CONDITIONS

Temp (°C)	DC Voltage (V)	Current (A)	Power (W)
22.4	58.0	0.0863	5.00

COLOR RENDERING INDEX DETAILS

Reference	Value
R1	97
R2	99
R3	98
R4	91
R5	94
R6	95
R7	94
R8	93
R9	93
R10	99
R11	93
R12	69
R13	99
R14	100
R15	94

NOMINAL CCT QUADRANGLES

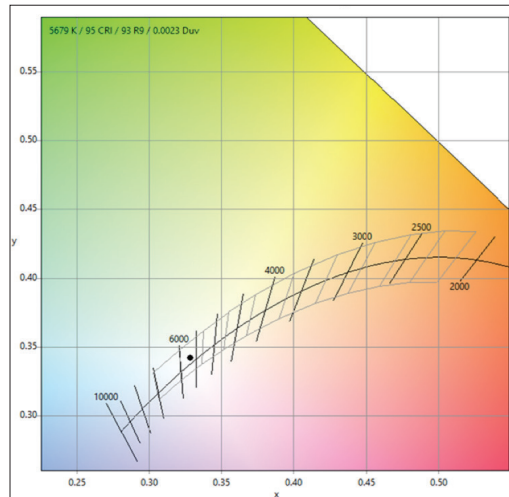

CHROMATICITY COORDINATES

Chromaticity (x)	0.3284
Chromaticity (y)	0.3421
Chromaticity (u)	0.2037
Chromaticity (v)	0.3183
Chromaticity (u)	0.2037
Chromaticity (v)	0.4775
Duv	0.0023


SUMMARY OF RESULTS

Total Lumen Output	585 Lumens
Luminaire Efficacy	117 lm/W
Maximum Candela	191 Candela
CCT	5679 K
CRI (Ra)	95
Duv	-0.0023
TM-30 R _f	88
TM-30 R _g	97

INTENSITY (CANDLEPOWER) SUMMARY

Angle	Mean CP	Lumens
0	190.9	
5	190.2	585
10	188.2	
15	184.8	567
20	179.9	
25	173.6	522
30	165.9	
35	156.8	447
40	146.2	
45	134.2	352
50	121.0	
55	106.5	248
60	91.0	
65	74.9	150
70	58.5	
75	42.5	70
80	28.1	
85	16.5	18
90	8.1	

SPECTRAL POWER DISTRIBUTION (SPD)

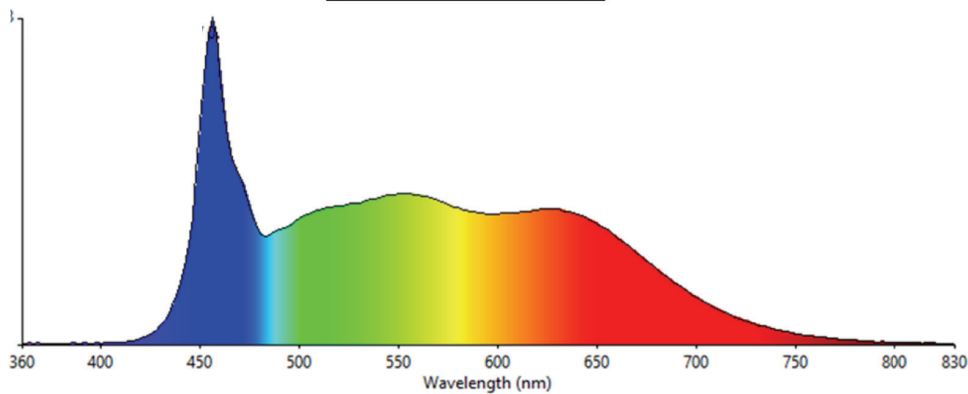

Testing was performed in accordance with LM-79-08.

POLAR GRAPH

