

GENERAL LIGHTING - LARGE LUMINAIRES



C-GENERAL-LLC1-2

APPLICATION

- Surface, suspended, or recessed mounted ceiling illumination
- 0-10V dimmable electronic power supply included
- For indoor use only

PHOTOMETRIC

Light Sources:

- 3000K/3500K >> LED Array – 59W
- Tunable White (2700K-5700K) >> LED Array – 50W
- CRI: >80

MECHANICAL

- Dimensions: Height = 4-1/2" (115mm); Diameter = 25-9/16" (650mm)
- IP Rating: IP20

Weight:

- 3000K/3500K >> 19.1lbs (8.7kg)
- Tunable White >> 14.5lbs (6.6kg)

ELECTRICAL

- Power Supply: Dimmable electronic
- Input Voltage: 120-277VAC (60Hz)

Dimming:

- 0-10V
- Tunable White (contact Cooledge for options)

FINISH COLOR

Add your selection using the following codes:

- W - White
- B - Black

ACCESSORIES

Required:


- Recessed luminaires require a Recessed Kit (contact Cooledge for details)



Surface Mount



Suspended/Recessed (kit req'd)

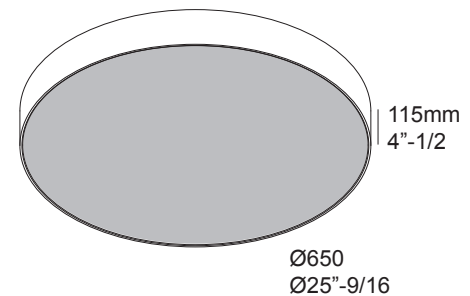

Mounting Type	3000K		3500K		Tunable White (2700K-5700K)	
	Order Code	Delivered Lumens	Order Code	Delivered Lumens	Order Code	Delivered Lumens
Surface	C-6 274 95 06 83 ED1	5598	C-6 274 95 06 85 ED1	5598	C-6 274 95 06 26 ED5	3502
Suspended/Recessed	C-6 274 97 06 83 ED1		C-6 274 97 06 85 ED1		C-6 274 97 06 26 ED5	
Recessed Kit	C-274 94 0710	N/A	C-274 94 0710	N/A	C-274 94 0710	N/A

SPECIFICATION SHEET

GENERAL LIGHTING - LARGE LUMINAIRES

C-GENERAL-LLC1-2 UP/DOWN

APPLICATION

- Suspended ceiling illumination with direct and indirect components
- 0-10V dimmable electronic power supply included
- For indoor use only

PHOTOMETRIC

Light Sources:

- 3000K/3500K >> LED Array UP – 17W; DOWN – 60W
- Tunable White (2700K-5700K) >> LED Array UP – 12W; DOWN – 50W
- CRI: >80

MECHANICAL

- Dimensions: Height = 4-1/2" (115mm); Diameter = 25-9/16" (650mm)
- IP Rating: IP20
- Weight: 14.5lbs (6.6kg)

ELECTRICAL

- Power Supply: Dimmable electronic
- Input Voltage: 120-277VAC (60Hz)

Dimming:


- 0-10V
- Tunable White (contact Cooledge for options)

FINISH COLOR

Add your selection using the following codes:

- W - White
- B - Black

ACCESSORIES

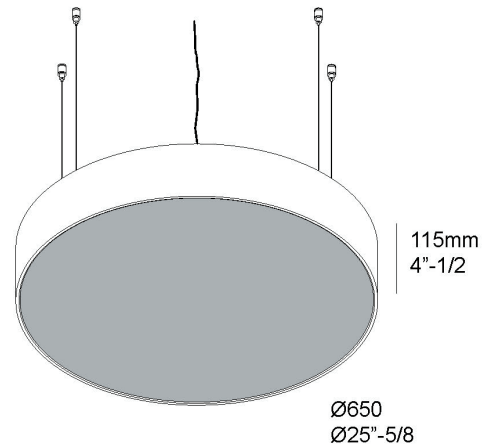

Mounting Type	3000K		3500K		Tunable White (2700K-5700K)	
	Order Code	Total Delivered Lumens	Order Code	Total Delivered Lumens	Order Code	Total Delivered Lumens
Suspended	C-6 274 96 06 83 ED1	7628	C-6 274 96 06 85 ED1	7628	C-6 274 96 06 26 ED5	6528

SPECIFICATION SHEET

GENERAL LIGHTING - LARGE LUMINAIRES

C-GENERAL-LLC1-3

APPLICATION

- Surface, suspended, or recessed mounted ceiling illumination
- 0-10V dimmable electronic power supply included
- For indoor use only

PHOTOMETRIC

Light Sources:

- 3000K/3500K >> LED Array – 147W
- Tunable White (2700K-5700K) >> LED Array – 127W
- CRI: >80

MECHANICAL

- Dimensions: Height = 4-1/2" (115mm); Diameter = 37-7/16" (950mm)
- IP Rating: IP20

Weight:

- 3000K/3500K >> 27.9lbs (12.7kg)
- Tunable White >> 19.6lbs (8.9kg)

ELECTRICAL

- Power Supply: Dimmable electronic
- Input Voltage: 120-277VAC (60Hz)

Dimming:

- 0-10V
- Tunable White (contact Cooledge for options)

FINISH COLOR

- Add your selection using the following codes:
- W - White
- B - Black

ACCESSORIES

Required:


- Recessed luminaires require a Recessed Kit (contact Cooledge for details)



Surface Mount



Suspended/Recessed (kit req'd)

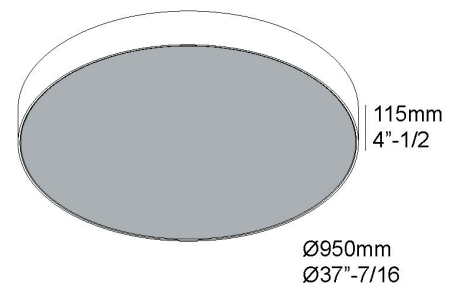

Mounting Type	3000K		3500K		Tunable White (2700K-5700K)	
	Order Code	Delivered Lumens	Order Code	Delivered Lumens	Order Code	Delivered Lumens
Surface	C-6 274 95 09 83 ED1	14,410	C-6 274 95 09 85 ED1	14,410	C-6 274 95 09 26 ED5	9005
Suspended/Recessed	C-6 274 97 09 83 ED1		C-6 274 97 09 85 ED1		C-6 274 97 09 26 ED5	
Recessed Kit	C-274 94 1010	N/A	C-274 94 1010	N/A	C-274 94 1010	N/A

SPECIFICATION SHEET

GENERAL LIGHTING - LARGE LUMINAIRES

C-GENERAL-LLC1-3 UP/DOWN

APPLICATION

- Suspended ceiling illumination with direct and indirect components
- 0-10V dimmable electronic power supply included
- For indoor use only

PHOTOMETRIC

Light Sources:

- 3000K/3500K >> LED Array UP – 30W; DOWN – 150W
- Tunable White (2700K-5700K) >> LED Array UP – 33W; DOWN – 141W
- CRI: >80

MECHANICAL

- Dimensions: Height = 4-1/2" (115mm); 37-7/16" (950mm)
- IP Rating: IP20
- Weight: 19.6lbs (8.9kg)

ELECTRICAL

- Power Supply: Dimmable electronic
- Input Voltage: 120-277VAC (60Hz)

Dimming:


- 0-10V
- Tunable White (contact Cooledge for options)

FINISH COLOR

Add your selection using the following codes:

- W - White
- B - Black

ACCESSORIES

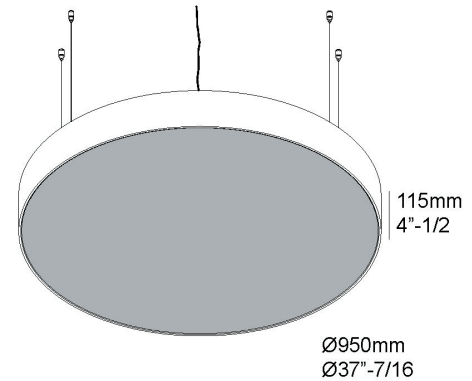

Mounting Type	3000K		3500K		Tunable White (2700K-5700K)	
	Order Code	Total Delivered Lumens	Order Code	Total Delivered Lumens	Order Code	Total Delivered Lumens
Suspended	C-6 274 96 09 83 ED1	18,550	C-6 274 96 09 85 ED1	18,550	C-6 274 96 09 26 ED5	16,075