



Your T-bar ceiling is installed and you need luminaires fast? Only have a few days to get your backlighting system ready? Cooledge’s QuickShip program will ensure you can meet your deadlines AND deliver a superior illumination solution with 10 day shipping for our revolutionary **FABRILum** and 3 day shipping for **TILE Lighting Systems**.

## THE DETAILS

- Only available in the US & Canada
- Orders are to be written to Cooledge Distribution Inc. and placed for processing with your local Cooledge manufacturer’s representative
- QuickShip lead times begin upon acknowledgment of order and credit approval
- See products listed below for specific lead times, qualified order quantities, and product models available for QuickShip
- Orders subject to Cooledge Standard Terms & Conditions and freight policy
- No changes can be made after release of order
- Released orders are subject to a minimum 50% cancellation fee based on the total purchase price
- Hold For Release (HFR) orders are not eligible
- No submittal sign-off is required. Purchaser is responsible for the accuracy of the order
- Orders must include full product order codes and total quantities per item to be eligible
- Orders must be accompanied by correct “ship to address” and customer contact information
- Cooledge may change product models included in the QuickShip program without prior notice

## PRODUCTS: FABRILUM



Order Code	Description
<b>Required for T-Bar Ceilings</b> <b>LACC-GR-K:</b> Imperial Grid (T-Bar) Adapter >> FABRILum luminaires (FBM-RS) may be used as lay-in fixtures in 15/16” T-bar ceilings. To enable this mounting option, an adapter kit is required.	
FBM-RS-HF-30-WH-010-UL	Cooledge FABRILum Luminaire, Surface Mount, RS (Rectangle 1200x1200mm / 4’x4’), High flux 9700 lm, CCT 3000K, 0-10V dimming, White finish, Acoustical property NRC 0.65 or Aw 0,45 (M) ISO Class D, UL-listed
FBM-RS-HF-35-WH-010-UL	Cooledge FABRILum Luminaire, Surface Mount, RS (Rectangle 1200x1200mm / 4’x4’), High flux 10000 lm, CCT 3500K, 0-10V dimming, White finish, Acoustical property NRC 0.65 or Aw 0,45 (M) ISO Class D, UL-listed
FBM-RS-HF-40-WH-010-UL	Cooledge FABRILum Luminaire, Surface Mount, RS (Rectangle 1200x1200mm / 4’x4’), High flux 10300 lm, CCT 4000K, 0-10V dimming, White finish, Acoustical property NRC 0.65 or Aw 0,45 (M) ISO Class D, UL-listed

### Grid (T-bar)


Integral luminaires that turn a regular T-bar ceiling into a canopy of light.

Great for T-bar Ceilings in:

- Offices
- Healthcare facilities
- Meeting rooms
- Educational buildings

**QuickShip Quantities: 1-10**  
**Ships in: max. 10 business days**

## PRODUCTS: LIGHTING SYSTEMS (TILE)

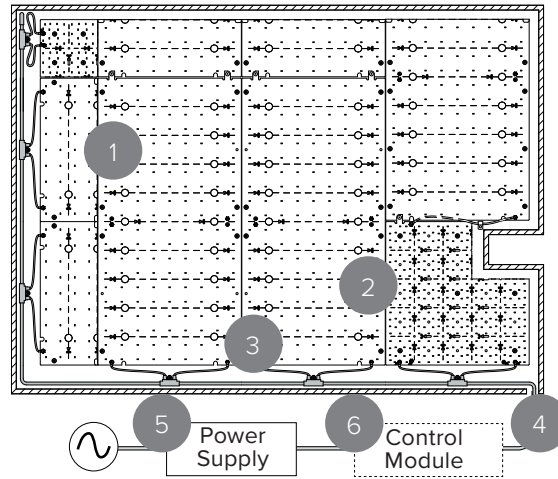


Create luminous ceilings, feature walls, and large graphics displays with Coolege TILE Interior products

1	TILE Interior
2	TILE Interior Cut-out Kit (optional)
3	TILE Interior T-Cable
4	TILE Interior Starter Cable*
5	Power Supply
6	Control Module (optional)

\*Included in TILE Interior Starter Kit


To assemble a complete TILE Lighting System follow the step-by-step selections:

### 1. Choose your standard TILES

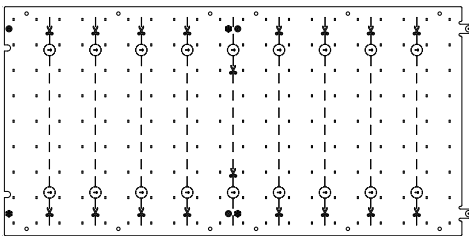


Order Code	Flux (lm/sqft)	CCT	Description
TILE-INT-xxx-yy-R2	xxx = • 600 • 300 • 150	yy = • 30 (3000K) • 35 (3500K) • 40 (4000K)	Cooledge TILE Interior: nom. 12" x 24" (300mm x 600mm), 150/300/600 lm/sqft, 3000K/3500K/4000K, CRI90
TILE-TUN-xxx-TNW-R2	xxx = • 600 • 300 • 150	TNW = 2700K-5700K	Cooledge TILE Tunable White: nom. 12" x 24" (300mm x 600mm), 150/300/600 lm/sqft, 2700K-5700K, CRI90

### 2. Choose your cut-out TILES (if required)




Order Code	Flux (lm/sqft)	CCT	Description
TACC-INT-CUT-xxx-yy-K	xxx = • 600 • 300 • 150	yy = • 30 (3000K) • 35 (3500K) • 40 (4000K)	Cooledge TILE Interior Cut-out Kit: nom. 12" x 12" (300mm x 300mm), 150/300/600 lm/sqft, 3000K/3500K/4000K, CRI90
TACC-TUN-CUT-xxx-TNW-K	xxx = • 600 • 300 • 150	TNW = 2700K-5700K	Cooledge TILE Tunable White Cut-out Kit: nom. 12" x 12" (300mm x 300mm), 150/300/600 lm/sqft, 2700K-5700K, CRI90

### 3. Choose your T-Cables




Order Code	Description
TCBL-T10	10 "T" Connectors
TCBL-T4	4 "T" Connectors

### 4. Choose your Power Supplies



Order Code	Description
EPSP-090-1CH-58V-010	90W Power Supply (UL)
EPSS-200-58V	200W Power Supply (UL)
EPSS-400-58V	400W Power Supply (UL)

### 5. Choose your Control Modules



Order Code	Description
CTR-SCT-DAL-58V	Control Module: Static CCT, 0-10V input, 400W, Single Channel x 4*
CTR-TNW-DAL-58V	Control Module: Tunable White, 0-10V input, 200W, Dual Channel x 2*

QuickShip Value: Orders up to \$10,000  
Ships in: max. 3 business days

\*Starter Kit (TACC-STR-K) quantities are automatically added according to the number of control channels ordered.