COOLEDGE TILE QUICK KIT ORDERING GUIDE




OVERVIEW


TILE Quick Kit contain all of the components required to illuminate a surface up to 1.4 sqm.

- 2 Types of TILE Quick Kit:
- 1. Basic: for use where no obstacles are present and the shape is rectilinear (square or rectangle)
- 2. Configurable: for use with obstacles and/or where angles/curves require the ability to cut TILEs in two directions

1. REFERENCE LAYOUTS - BASIC

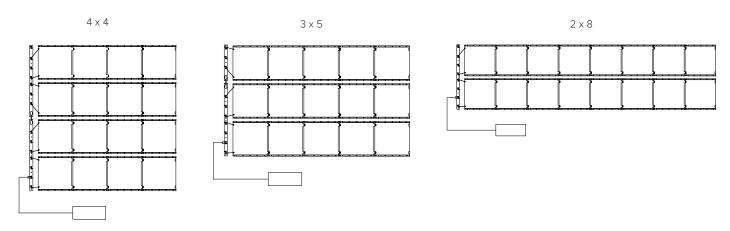

2. REFERENCE LAYOUTS - CONFIGURABLE

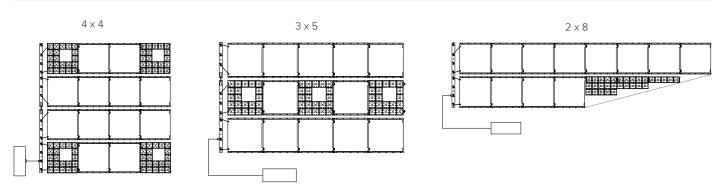

See reverse for Ordering Information.

COOLEDGE TILE QUICK KIT ORDERING GUIDE

TILE QUICK KIT CONTENTS

BASIC KIT

| Quantity | System Overview | Description |
|----------|--------------------------------|-----------------------------------|
| 16 | TILE Interior | 600lm, CRI80, 3000K/4000K |
| 2 | TILE Interior Connector Kit | Connector Strip + Jumper Wires |
| 1 | TILE Interior Starter Cable | 10' (3m) Cable |
| 1 | Dimmable LED Driver | 90W, 58VDC, 0/1-10V input |

CONFIGURABLE KIT

| Quantity | System Overview | Description |
|----------|--------------------------------|------------------------------------|
| 12 | TILE Interior | 600lm, CRI80, 3000K/4000K |
| 4 | TILE Interior Cut-Out Kit | Cut-out TILE + Long Jumper Wire |
| 2 | TILE Interior Connector Kit | Connector Strip + Jumper Wires |
| 1 | TILE Interior Starter Cable | 10' (3m) Cable |
| 1 | Dimmable LED Driver | 90W, 58VDC, 0/1-10V input |

ORDERING INFORMATION

| Description | Order Code | Certification | #TILEs | #Cut-outs | ССТ |
|--|------------------------|---------------|--------|-----------|-------|
| TILE Quick Kit Basic: 600lm, 3000K, CRI80 — CE Compliant | TILE-QKT-600-30-CE-BAS | CE Compliant | 16 | 0 | 3000K |
| TILE Quick Kit Basic: 600lm, 4000K, CRI80 - CE Compliant | TILE-QKT-600-40-CE-BAS | CE Compliant | 16 | 0 | 4000K |
| TILE Quick Kit Configurable: 600lm, 3000K, CRI80 - CE Compliant | TILE-QKT-600-30-CE-CFG | CE Compliant | 12 | 4 | 3000K |
| TILE Quick Kit Configurable: 600lm, 4000K, CRI80 - CE Compliant | TILE-QKT-600-40-CE-CFG | CE Compliant | 12 | 4 | 4000K |